


Remote Printer

Sentinel B-21/I-21/F-21/C-20 Instruments

APPLICATION BULLETIN #133A

June 6, 2002

- Battery-powered
- Prints at 1 line/sec
- 1500 lines per charge
- 21 characters per line
- Plugs into 9 pin serial connector on instrument terminal
- Used for quick data or setup download
- Supplied with AC charging unit.

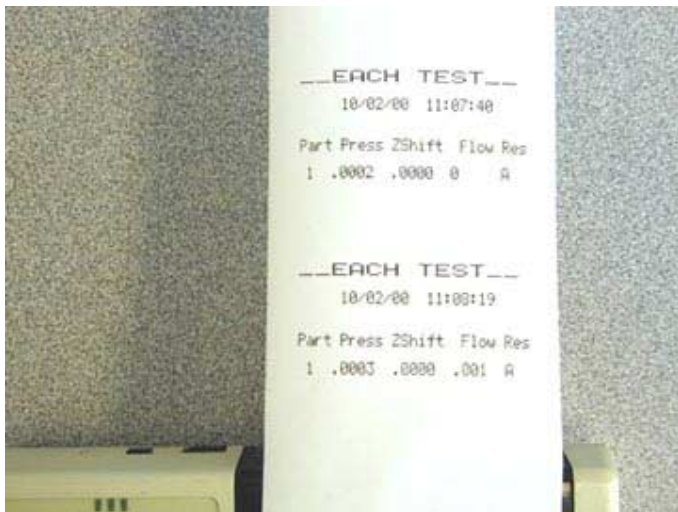

Sample of an individualized printout obtained for each part.

To obtain an individualized printout for each part, the operator must push the “COMM” key on the Sentinel B-21, I-21, or F-21 instrument panel and select the “Each test” output. The printer will print the heading, “EACH TEST”, and the time and date. At the conclusion of the test, the test results are printed as shown. The printed results include the part program number, pressure loss, zero shift, leak rate value, and accept/reject result. The operator can tear off the printed results and tape or attach them to the tested part. Before the next test the operator must again push the “COMM” key and select the “Each test” output.



Cincinnati Test Systems, Inc.

Member of TASI - A Total Automated Solutions Inc. Company

5555 Dry Fork Road, Village of Cleves, OH 45002 • Tel. 513-367-6699 • Fax 513-367-5426

Website: www.cincinnati-test.com • E-mail: sales@cincinnati-test.com